



Burr-Brown Products
from Texas Instruments



OPA363
OPA2363
OPA364
OPA2364
OPA4364

SBOS259B – SEPTEMBER 2002 – REVISED FEBRUARY 2003

1.8V, 7MHz, 90dB CMRR, SINGLE-SUPPLY, RAIL-TO-RAIL I/O OPERATIONAL AMPLIFIER

FEATURES

- 1.8V OPERATION
- *MicroSIZE* PACKAGES
- BANDWIDTH: 7MHz
- CMRR: 90dB (typical)
- SLEW RATE: 5V/ μ s
- LOW OFFSET: 500 μ V (max)
- QUIESCENT CURRENT: 750 μ A/Channel (max)
- SHUTDOWN MODE: < 1 μ A/Channel

APPLICATIONS

- SIGNAL CONDITIONING
- DATA ACQUISITION
- PROCESS CONTROL
- ACTIVE FILTERS
- TEST EQUIPMENT

DESCRIPTION

The OPA363 and OPA364 families are high-performance CMOS operational amplifiers optimized for very low voltage, single-supply operation. These miniature, low-cost amplifiers are designed to operate on single supplies from 1.8V ($\pm 0.9V$) to 5.5V ($\pm 2.75V$). Applications include sensor amplification and signal conditioning in battery-powered systems.

The OPA363 and OPA364 families offer excellent CMRR without the crossover associated with traditional complementary input stages. This results in excellent performance for driving Analog-to-Digital (A/D) converters without degradation of differential linearity and THD. The input common-mode range includes both the negative and positive supplies. The output voltage swing is within 10mV of the rails.

The OPA363 family includes a shutdown mode. Under logic control, the amplifiers can be switched from normal operation to a standby current that is less than 1 μ A.

The single version is available in the *MicroSIZE* SOT23-5 (SOT23-6 for shutdown) and SO-8. The dual version is available in MSOP-8, MSOP-10, and SO-8 packages. Quad packages are available in TSSOP-14 and SO-14 packages. All versions are specified for operation from -40°C to $+125^{\circ}\text{C}$.

| | OPA363 | OPA364 | OPA2363 | OPA2364 | OPA4364 |
|----------|--------|--------|---------|---------|---------|
| SOT23-5 | | x | | | |
| SOT23-6 | x | | | | |
| MSOP-8 | | | | x | |
| MSOP-10 | | | x | | |
| SO-8 | x | x | | x | |
| TSSOP-14 | | | | | x |
| SO-14 | | | | | x |



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

ABSOLUTE MAXIMUM RATINGS⁽¹⁾

| | | |
|--|-------|----------------------|
| Supply Voltage | | +5.5V |
| Signal Input Terminals, Voltage ⁽²⁾ | | -0.5V to (V+) + 0.5V |
| Current ⁽²⁾ | | ±10mA |
| Enable Input | | (V-) - 0.5V to 5.5V |
| Output Short-Circuit ⁽³⁾ | | Continuous |
| Operating Temperature | | -40°C to +150°C |
| Storage Temperature | | -65°C to +150°C |
| Junction Temperature | | +150°C |
| Lead Temperature (soldering, 10s) | | +300°C |

NOTES: (1) Stresses above these ratings may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those specified is not implied. (2) Input terminals are diode-clamped to the power-supply rails. Input signals that can swing more than 0.5V beyond the supply rails should be current limited to 10mA or less. (3) Short-circuit to ground one amplifier per package.



ELECTROSTATIC DISCHARGE SENSITIVITY

This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.







PACKAGE/ORDERING INFORMATION

| PRODUCT | PACKAGE-LEAD | PACKAGE DESIGNATOR ⁽¹⁾ | SPECIFIED TEMPERATURE RANGE | PACKAGE MARKING | ORDERING NUMBER | TRANSPORT MEDIA, QUANTITY |
|----------------|---------------|-----------------------------------|-----------------------------|-----------------|--------------------------------|---|
| OPA363I " | SOT23-6 " | DBV " | -40°C to +125°C " | A40 " | OPA363IDBVT OPA363IDBVR | Tape and Reel, 250 Tape and Reel, 3000 |
| OPA363I " | SO-8 " | D " | -40°C to +125°C " | OPA363 " | OPA363ID OPA363IDR | Rails, 100 Tape and Reel, 2500 |
| OPA2363I " | MSOP-10 " | DGS " | -40°C to +125°C " | BHK " | OPA2363IDGST OPA2363IDGSR | Tape and Reel, 250 Tape and Reel, 2500 |
| OPA364I " | SOT23-5 " | DBV " | -40°C to +125°C " | A41 " | OPA364IDBVT OPA364IDBVR | Tape and Reel, 250 Tape and Reel, 3000 |
| OPA364I " | SO-8 " | D " | -40°C to +125°C " | OPA364 " | OPA364ID OPA364IDR | Rails, 100 Tape and Reel, 2500 |
| OPA2364I " | MSOP-8 " | DGK " | -40°C to +125°C " | BHL " | OPA2364IDGKT OPA2364IDGKR | Tape and Reel, 250 Tape and Reel, 2500 |
| OPA2364I " | SO-8 " | D " | -40°C to +125°C " | OPA2364 " | OPA2364ID OPA2364IDR | Rails, 100 Tape and Reel, 2500 |
| OPA363AI " | SOT23-6 " | DBV " | -40°C to +125°C " | A40 " | OPA363AIDBVT OPA363AIDBVR | Tape and Reel, 250 Tape and Reel, 3000 |
| OPA363AI " | SO-8 " | D " | -40°C to +125°C " | OPA363A " | OPA363AID OPA363AIDR | Rails, 100 Tape and Reel, 2500 |
| OPA2363AI " | MSOP-10 " | DGS " | -40°C to +125°C " | BHK " | OPA2363AIDGST OPA2363AIDGSR | Tape and Reel, 250 Tape and Reel, 2500 |
| OPA364AI " | SOT23-5 " | DBV " | -40°C to +125°C " | A41 " | OPA364AIDBVT OPA364AIDBVR | Tape and Reel, 250 Tape and Reel, 3000 |
| OPA364AI " | SO-8 " | D " | -40°C to +125°C " | OPA364A " | OPA364AID OPA364AIDR | Rails, 100 Tape and Reel, 2500 |
| OPA2364AI " | SO-8 " | D " | -40°C to +125°C " | OPA2364A " | OPA2364AID OPA2364AIDR | Rails, 100 Tape and Reel, 2500 |
| OPA2364AI " | MSOP-8 " | DGK " | -40°C to +125°C " | BHL " | OPA2364AIDGKT OPA2364AIDGKR | Tape and Reel, 250 Tape and Reel, 2500 |
| OPA4364AI " | SO-14 " | D " | -40°C to +125°C " | OPA4364A " | OPA4364AID OPA4364AIDR | Rails, 58 Tape and Reel, 2500 |
| OPA4364AI " | TSSOP-14 " | PW " | -40°C to +125°C " | OPA4364A " | OPA4364AIPWT OPA4364AIPWR | Tape and Reel, 250 Tape and Reel, 2500 |

NOTES: (1) For the most current specifications and package information, refer to our web site at www.ti.com.


PIN CONFIGURATIONS

Top View

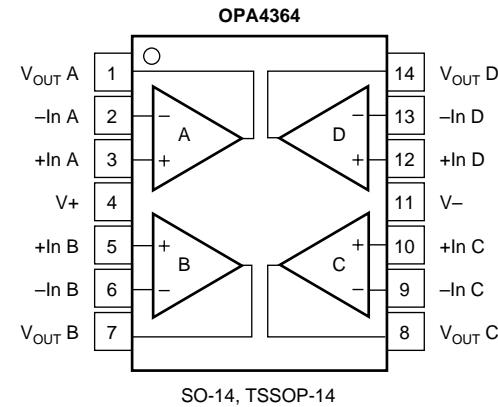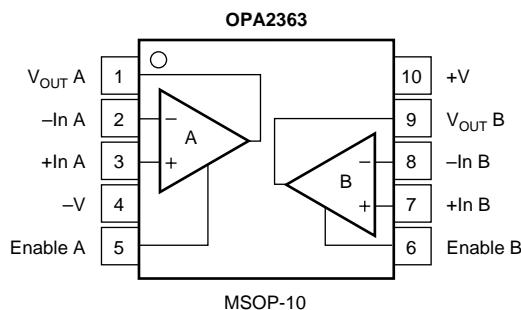

NOTE: (1) Orient according to marking.

NC = No Internal Connection.

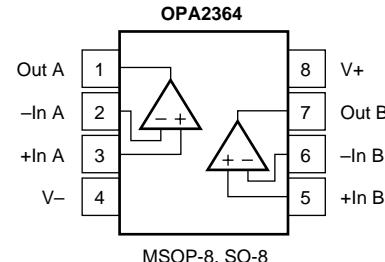

ELECTRICAL CHARACTERISTICS: $V_S = +1.8V$ to $+5.5V$

Boldface limits apply over the specified temperature range, $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$.







At $T_A = +25^\circ\text{C}$, $R_L = 10\text{k}\Omega$ connected to $V_S/2$, and $V_{\text{OUT}} = V_S/2$, $V_{\text{CM}} = V_S/2$, unless otherwise noted.

| PARAMETER | CONDITION | OPAx363, OPAx364 | | | UNITS |
|--|---|---|---|---|---|
| | | MIN | TYP | MAX | |
| OFFSET VOLTAGE Input Offset Voltage, OPA363I, OPA364I OPA2363I, OPA2364I OPA363AI, OPA364AI, OPA2363AI, OPA2364AI, OPA4364AI Drift vs Power Supply Channel Separation, dc | $V_S = +5V$ $V_S = 1.8V$ to $5.5V$, $V_{\text{CM}} = 0$ | | | 500 900 2.5 1 3 80 1 330 | μV μV mV $\mu\text{V}/^\circ\text{C}$ $\mu\text{V}/\text{V}$ $\mu\text{V}/\text{V}$ |
| INPUT BIAS CURRENT Input Bias Current over Temperature Input Offset Current | I_B I_{OS} | | ± 1 See Typical Characteristics ± 1 | ± 10 ± 10 | pA pA |
| NOISE Input Voltage Noise, $f = 0.1\text{Hz}$ to 10Hz Input Voltage Noise Density, $f = 10\text{kHz}$ Input Current Noise Density, $f = 10\text{kHz}$ | e_n e_n i_n | | 10 17 0.6 | | $\mu\text{Vp-p}$ $\text{nV}/\sqrt{\text{Hz}}$ $\text{fA}/\sqrt{\text{Hz}}$ |
| INPUT VOLTAGE RANGE Common-Mode Voltage Range Common-Mode Rejection Ratio | V_{CM} CMRR | $(V-) - 0.1V < V_{\text{CM}} < (V+) + 0.1V$ | (V-) – 0.1 74 | 90 | (V+) + 0.1 V dB |
| INPUT CAPACITANCE Differential Common-Mode | | | | 2 3 | pF pF |
| OPEN-LOOP GAIN Open-Loop Voltage Gain OPA4364AI over Temperature | A_{OL} | $R_L = 10\text{k}\Omega$, $100\text{mV} < V_O < (V+) - 100\text{mV}$ $V_S = +1.8V$ to $+5.5V$ | 94 90 86 | 100 | dB dB dB |
| FREQUENCY RESPONSE Gain Bandwidth Product Slew Rate SR Settling Time, 0.1% 0.01% Overload Recovery Time Total Harmonic Distortion + Noise | GBW t_S THD+N | $C_L = 100\text{pF}$ $G = +1$ $V_S = +5V$, 4V Step, $G = +1$ $V_S = +5V$, 4V Step, $G = +1$ $V_{\text{IN}} \cdot \text{Gain} > V_S$ $V_S = +5V$, $G = +1$, $f = 20\text{Hz}$ to 20kHz | | 7 5 1 1.5 0.8 0.002 | MHz $\text{V}/\mu\text{s}$ μs μs μs % |
| OUTPUT Voltage Output Swing from Rail over Temperature Short-Circuit Current Capacitive Load Drive | I_{SC} C_{LOAD} | $R_L = 10\text{k}\Omega$ $R_L = 10\text{k}\Omega$ | | 10 20 20 | mV mV mA |
| SHUTDOWN (for OPAx363) t_{OFF} $t_{\text{ON}}^{(1)}$ V_L (shutdown) V_H (amplifier is active) I_{QSD} | | | 0.75 (V+) | 1 20 (V-) + 0.8 5.5 0.9 | μs μs V V μA |
| POWER SUPPLY Specified Voltage Range Operating Voltage Range Quiescent Current (per amplifier) | V_S I_Q | | 1.8 | 1.8 to 5.5 650 850 1.1 | 5.5 V V μA μA mA |
| TEMPERATURE RANGE Specified Range Operating Range Storage Range Thermal Resistance SOT23-5, SOT23-6 MSOP-8, MSOP-10, SO-8 TSSOP-14, SO-14 | θ_{JA} | | -40 -40 -65 | 200 150 100 | $+125$ $+150$ $+150$ $^\circ\text{C}/\text{W}$ $^\circ\text{C}/\text{W}$ $^\circ\text{C}/\text{W}$ |

NOTE: (1) Part is considered enabled when input offset voltage returns to specified range.







TYPICAL CHARACTERISTICS

At $T_{CASE} = +25^\circ\text{C}$, $R_L = 10\text{k}\Omega$, and connected to $V_S/2$, $V_{OUT} = V_S/2$, $V_{CM} = V_S/2$, unless otherwise noted.

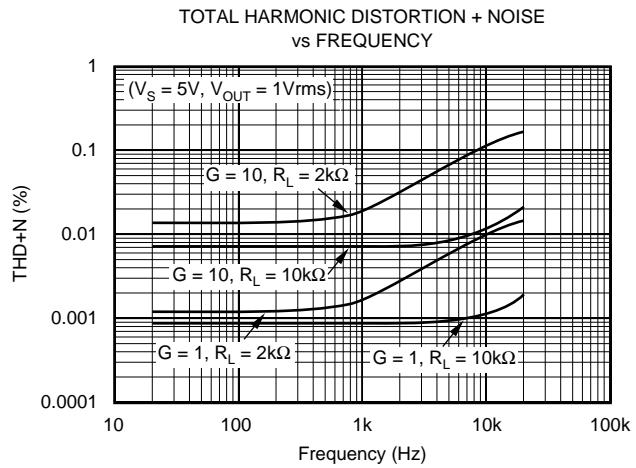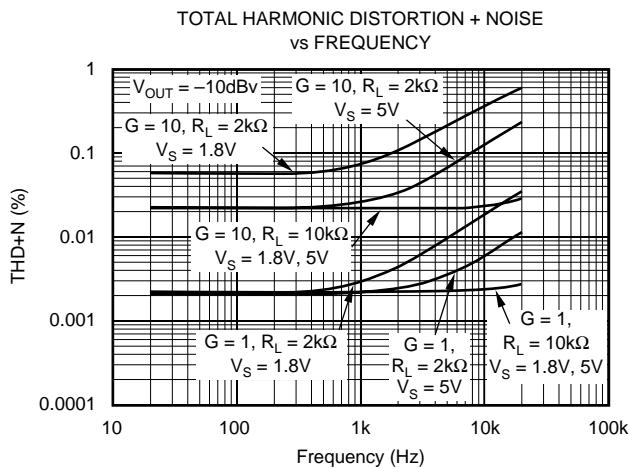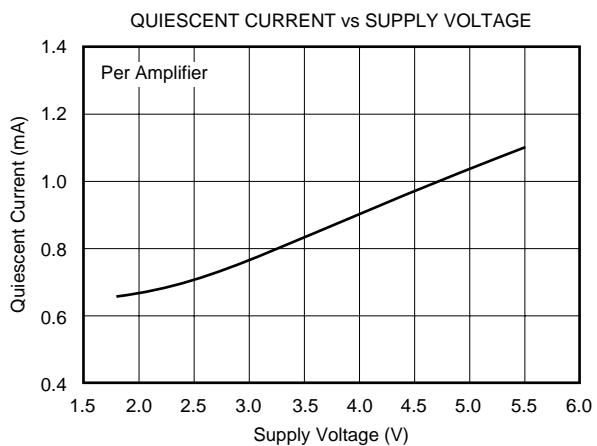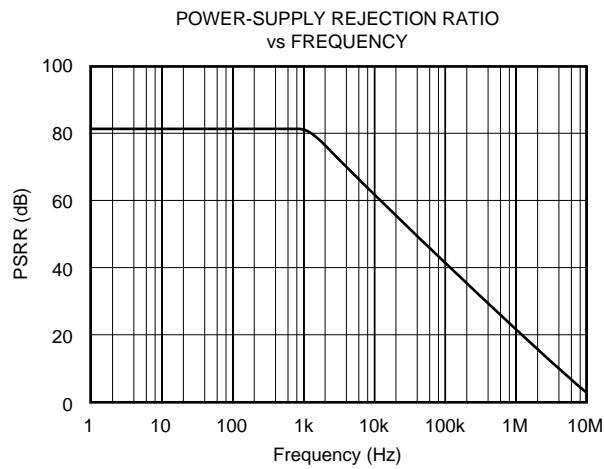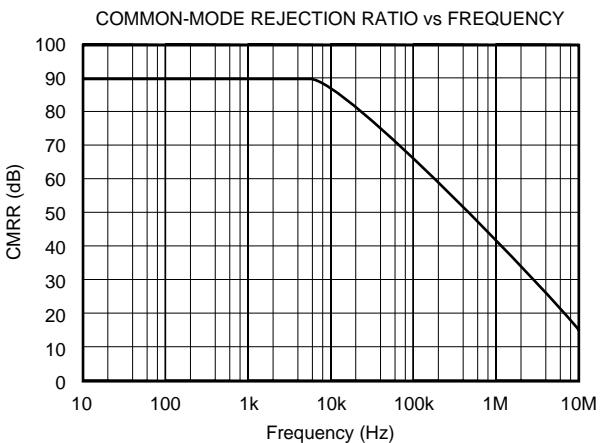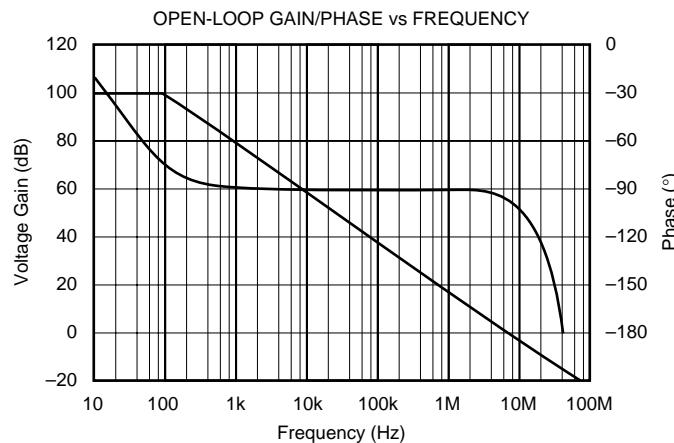







TYPICAL CHARACTERISTICS (Cont.)

At $T_{CASE} = +25^\circ\text{C}$, $R_L = 10\text{k}\Omega$, and connected to $V_S/2$, $V_{OUT} = V_S/2$, $V_{CM} = V_S/2$, unless otherwise noted.

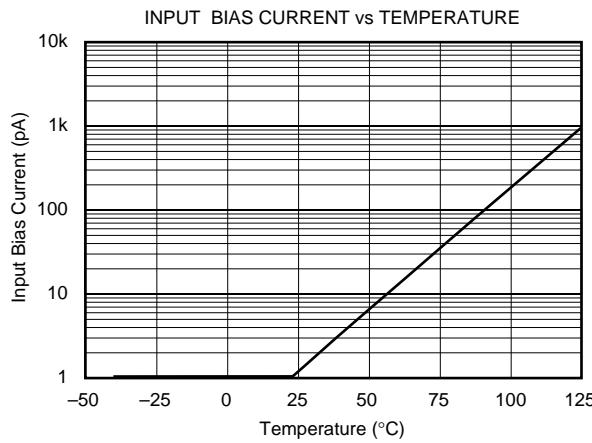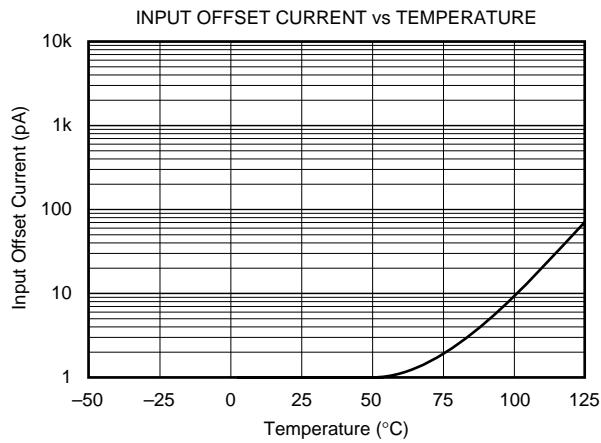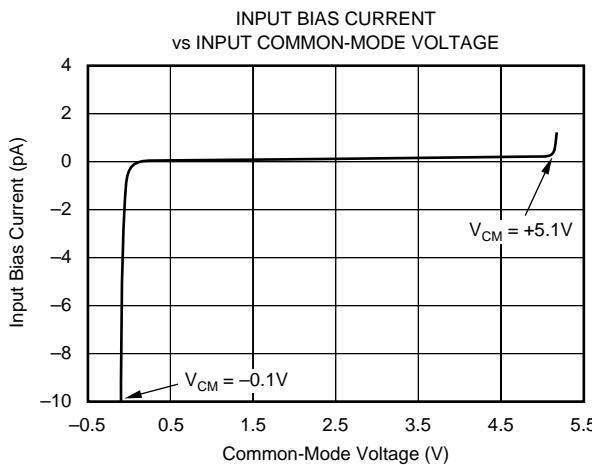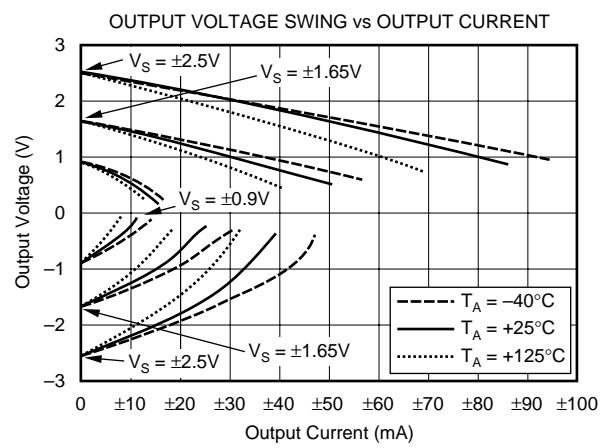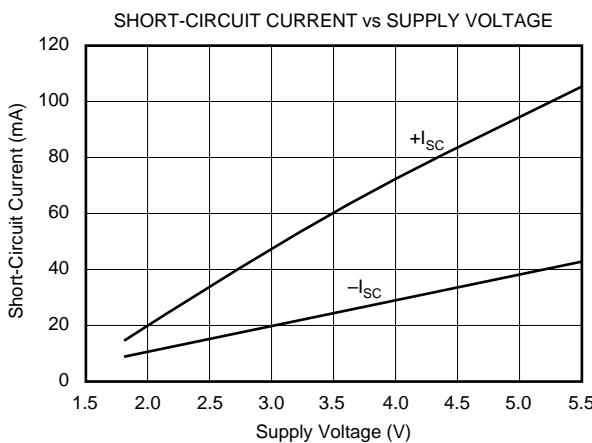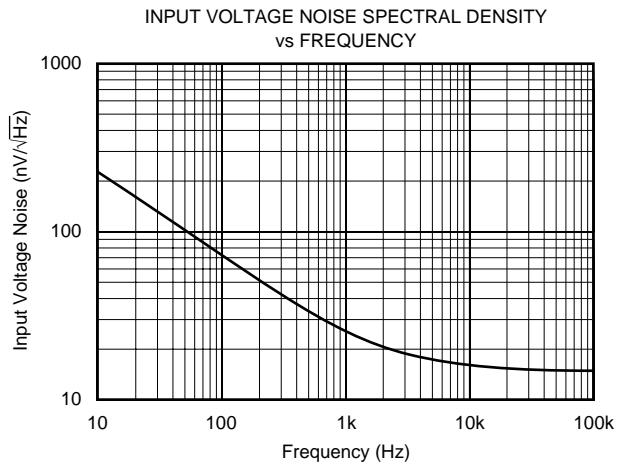



TYPICAL CHARACTERISTICS (Cont.)

At $T_{CASE} = +25^\circ\text{C}$, $R_L = 10\text{k}\Omega$, and connected to $V_S/2$, $V_{OUT} = V_S/2$, $V_{CM} = V_S/2$, unless otherwise noted.

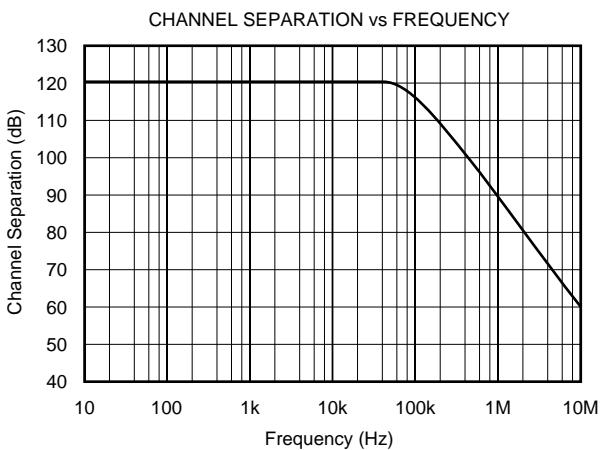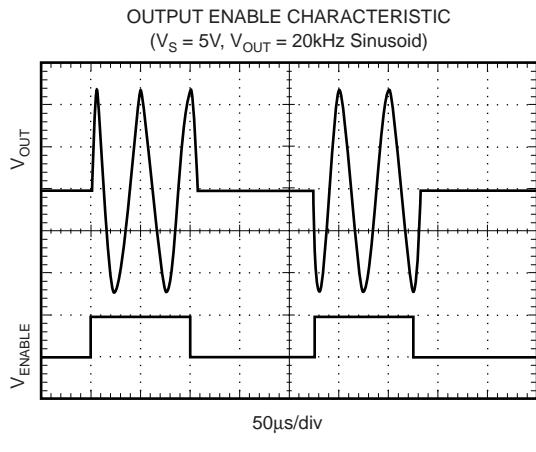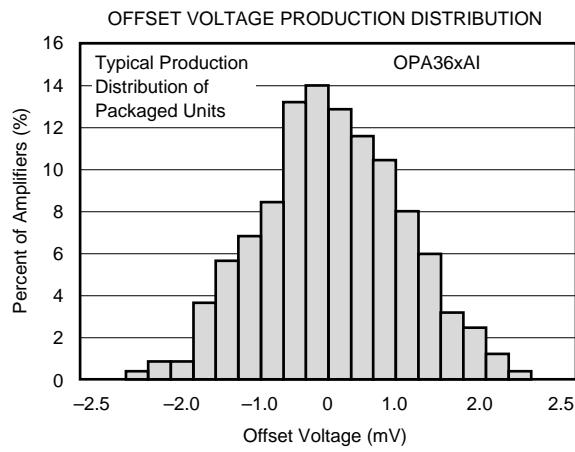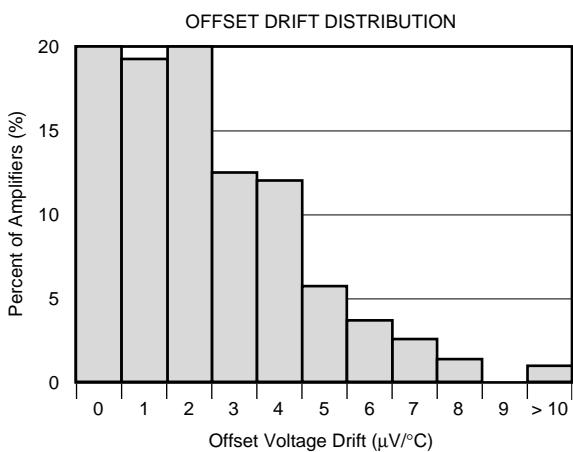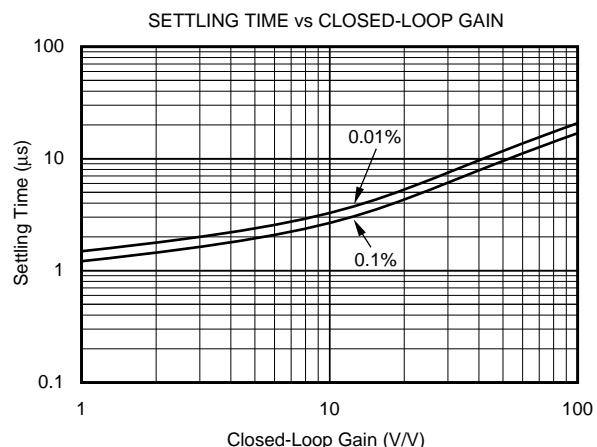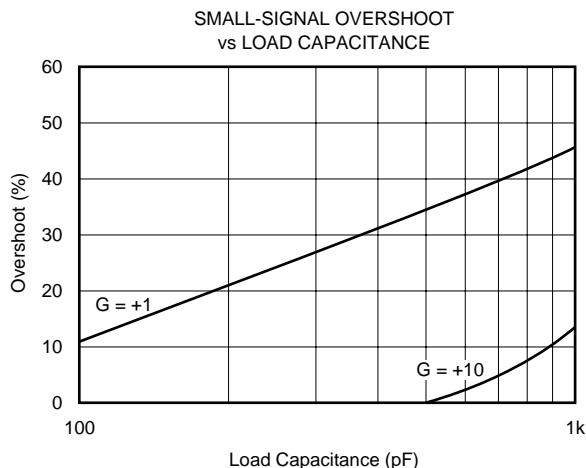

TYPICAL CHARACTERISTICS (Cont.)

At $T_{CASE} = +25^\circ\text{C}$, $R_L = 10\text{k}\Omega$, and connected to $V_S/2$, $V_{OUT} = V_S/2$, $V_{CM} = V_S/2$, unless otherwise noted.

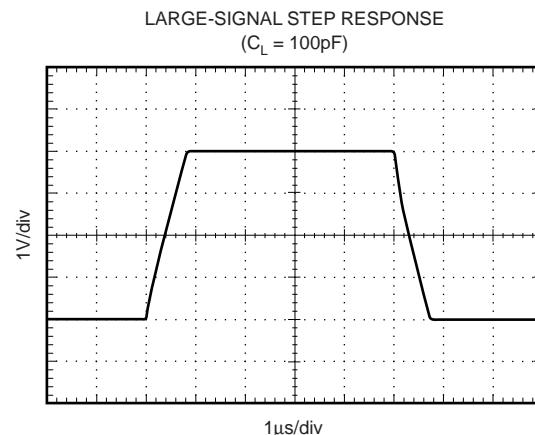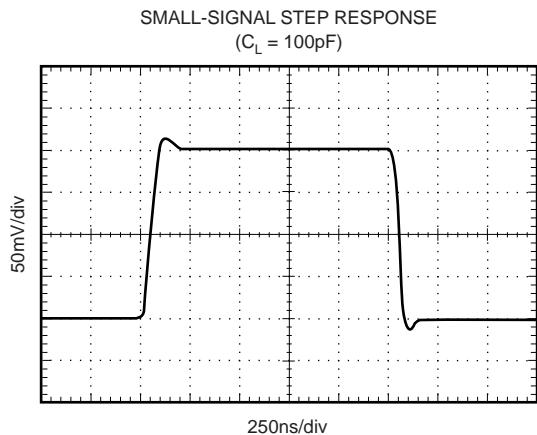

APPLICATIONS INFORMATION

The OPA363 and OPA364 series op amps are rail-to-rail operational amplifiers with excellent CMRR, low noise, low offset, and wide bandwidth on supply voltages as low as $\pm 0.9\text{V}$. The OPA363 features an additional pin for shutdown/enable function. These families do not exhibit phase reversal and are unity-gain stable. Specified over the industrial temperature range of -40°C to $+125^\circ\text{C}$, the OPA363 and OPA364 families offer precision performance for a wide range of applications.

RAIL-TO-RAIL INPUT

The OPA363 and OPA364 feature excellent rail-to-rail operation, with supply voltages as low as $\pm 0.9\text{V}$. The input common-mode voltage range of the OPA363 and OPA364 family extends 100mV beyond supply rails. The unique input topology of the OPA363 and OPA364 eliminates the input offset transition region typical of most rail-to-rail complimentary stage operational amplifiers, allowing the OPA363 and OPA364 to provide superior common-mode performance over the entire common-mode input range, as seen in Figure 1. This feature prevents degradation of the differential linearity error and THD when driving A/D converters. A simplified schematic of the OPA363 and OPA364 is shown in Figure 2.

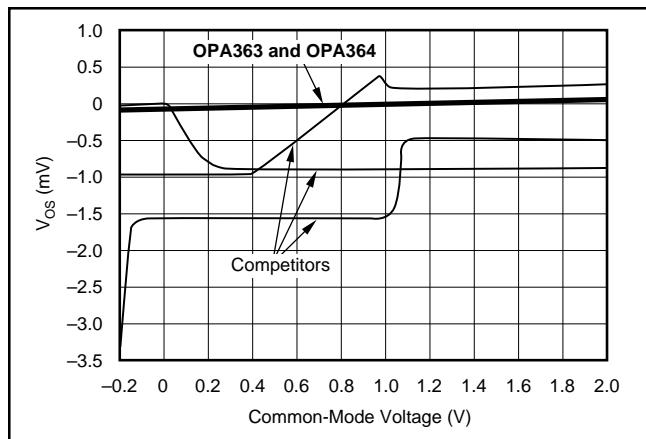


FIGURE 1. OPA363 and OPA364 have Linear Offset Over Entire Common-Mode Range.

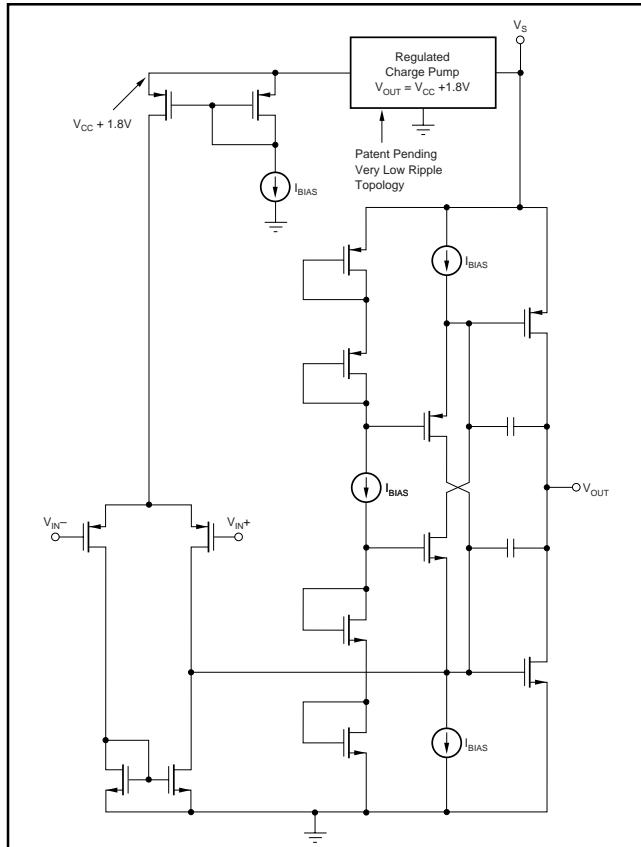


FIGURE 2. Simplified Schematic.

OPERATING VOLTAGE

The OPA363 and OPA364 series op amp parameters are fully specified from $+1.8\text{V}$ to $+5.5\text{V}$. Single $0.1\mu\text{F}$ bypass capacitors should be placed across supply pins and as close to the part as possible. Supply voltages higher than 5.5V (absolute maximum) may cause permanent damage to the amplifier. Many specifications apply from -40°C to $+125^\circ\text{C}$. Parameters that vary significantly with operating voltages or temperature are shown in the Typical Characteristics.

ENABLE FUNCTION

The shutdown (enable) function of the OPA363 is referenced to the negative supply voltage of the operational amplifier. A logic level HIGH enables the op amp. A valid logic HIGH is defined as voltage $> 75\%$ of the positive supply applied to the enable pin. The valid logic HIGH signal can be as much as 5.5V above the negative supply, independent of the positive supply voltage. A valid logic LOW is defined as $< 0.8\text{V}$ above the negative supply pin. If dual or split power supplies are used, care should be taken to ensure logic input signals are properly referred to the negative supply voltage. This pin should be connected to a valid high or low voltage or driven, not left open circuit.

The logic input is a high-impedance CMOS input. Dual op amps are provided separate logic inputs. For battery-operated applications, this feature may be used to greatly reduce the average current and extend battery life. The enable time is $20\mu\text{s}$; disable time is $1\mu\text{s}$. When disabled, the output assumes a high-impedance state. This allows the OPA363 to be operated as a "gated" amplifier, or to have its output multiplexed onto a common analog output bus.

CAPACITIVE LOAD

The OPA363 and OPA364 series op amps can drive a wide range of capacitive loads. However, all op amps under certain conditions may become unstable. Op amp configuration, gain, and load value are just a few of the factors to consider when determining stability. An op amp in unity-gain configuration is the most susceptible to the effects of capacitive load. The capacitive load reacts with the output resistance of the op amp to create a pole in the small-signal response, which degrades the phase margin.

In unity gain, the OPA363 and OPA364 series op amps perform well with a pure capacitive load up to approximately 1000pF . The ESR (Equivalent Series Resistance) of the loading capacitor may be sufficient to allow the OPA363 and OPA364 to directly drive very large capacitive loads ($> 1\mu\text{F}$). Increasing gain enhances the amplifier's ability to drive more capacitance. See the typical characteristic "Small-Signal Overshoot vs Capacitive Load."

One method of improving capacitive load drive in the unity-gain configuration is to insert a 10Ω to 20Ω resistor in series with the output, as shown in Figure 3. This significantly reduces ringing with large capacitive loads. However, if there is a resistive load in parallel with the capacitive load, it creates a voltage divider introducing a dc error at the output and slightly reduces output swing. This error may be insignificant. For instance, with $R_L = 10\text{k}\Omega$ and $R_S = 20\Omega$, there is only about a 0.2% error at the output.

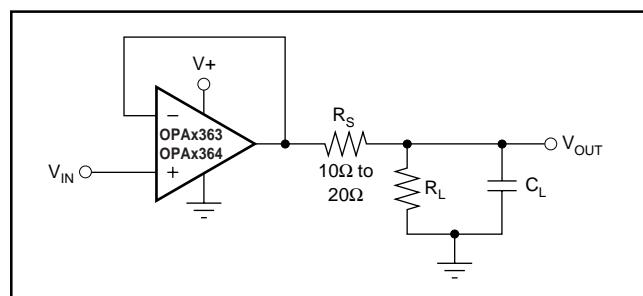


FIGURE 3. Improving Capacitive Load Drive.

OPA363, 2363, 364, 2364, 4364

SBOS259B

INPUT AND ESD PROTECTION

All OPA363 and OPA364 pins are static protected with internal ESD protection diodes tied to the supplies. These diodes will provide overdrive protection if the current is externally limited to 10mA , as stated in the absolute maximum ratings and shown in Figure 4.

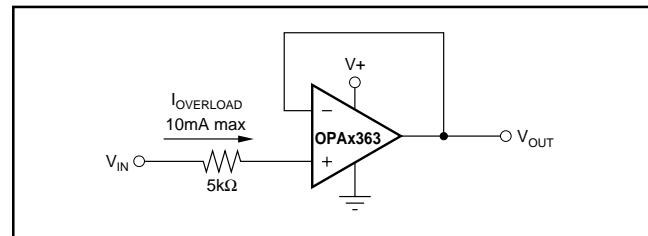


FIGURE 4. Input Current Protection.

ACHIEVING OUTPUT SWING TO THE OP AMP'S NEGATIVE RAIL

Some applications require an accurate output voltage swing from 0V to a positive full-scale voltage. A good single supply op amp may be able to swing within a few mV of single supply ground, but as the output is driven toward 0V , the output stage of the amplifier will prevent the output from reaching the negative supply rail of the amplifier.

The output of the OPA363 or OPA364 can be made to swing to ground, or slightly below, on a single supply power source. To do so requires use of another resistor and an additional, more negative power supply than the op amp's negative supply. A pulldown resistor may be connected between the output and the additional negative supply to pull the output down below the value that the output would otherwise achieve as shown in Figure 5.

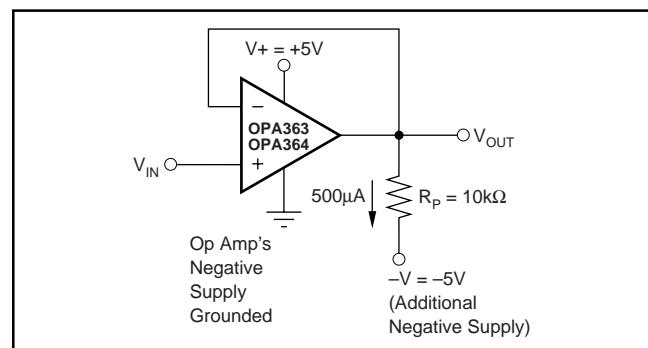


FIGURE 5. OPA363 and OPA364 Swing to Ground.

This technique will not work with all op amps. The output stage of the OPA363 and OPA364 allows the output voltage to be pulled below that of most op amps, if approximately $500\mu\text{A}$ is maintained through the output stage. To calculate the appropriate value load resistor and negative supply, $R_L = -V/500\mu\text{A}$. The OPA363 and OPA364 have been characterized to perform well under the described conditions, maintaining excellent accuracy down to 0V and as low as -10mV . Limiting and nonlinearity occur below -10mV , with linearity returning as the output is again driven above -10mV .

BUFFERED REFERENCE VOLTAGE

Many single-supply applications require a mid-supply reference voltage. The OPA363 and OPA364 offer excellent capacitive load drive capability, and can be configured to provide a 0.9V reference voltage, as can be seen in Figure 6. For appropriate loading considerations, see the "Capacitive Load" section.

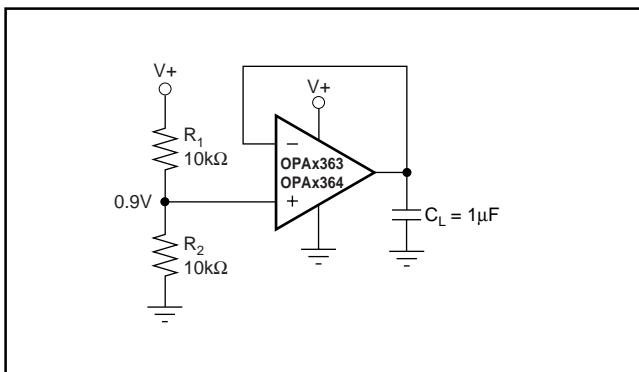


FIGURE 6. The OPA363 and OPA364 Provide a Stable Reference Voltage.

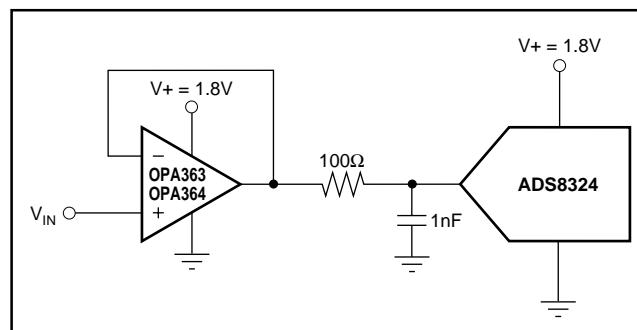


FIGURE 7. The OPA363 and OPA364 Directly Drive the ADS8324.

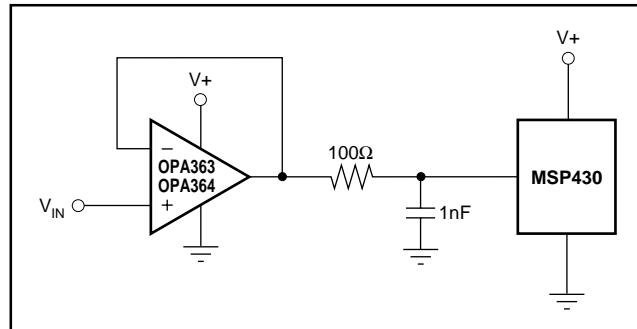


FIGURE 8. Driving the 12-Bit A/D Converter on the MSP430.

DIRECTLY DRIVING THE ADS8324 AND THE MSP430

The OPA363 and OPA364 series op amps are optimized for driving medium speed (up to 100kHz) sampling A/D converters. However, they also offer excellent performance for higher speed converters. The no crossover input stage of the OPA363 and OPA364 directly drive A/D converters without degradation of differential linearity and THD. They provide an effective means of buffering the A/D converters input capacitance and resulting charge injection while providing signal gain. Figure 7 and Figure 8 show the OPA363 and OPA364 configured to drive the ADS8324 and the 12-bit A/D converter on the MSP430.

AUDIO APPLICATIONS

The OPA363 and OPA364 op amp family has linear offset voltage over the entire input common-mode range. Combined with low-noise, this feature makes the OPA363 and OPA364 suitable for audio applications. Single supply 1.8V operation allows the OPA363 and OPA364 to be optimal candidates for dual stereo-headphone drivers and microphone pre-amplifiers in portable stereo equipment, see Figures 9 and 10.

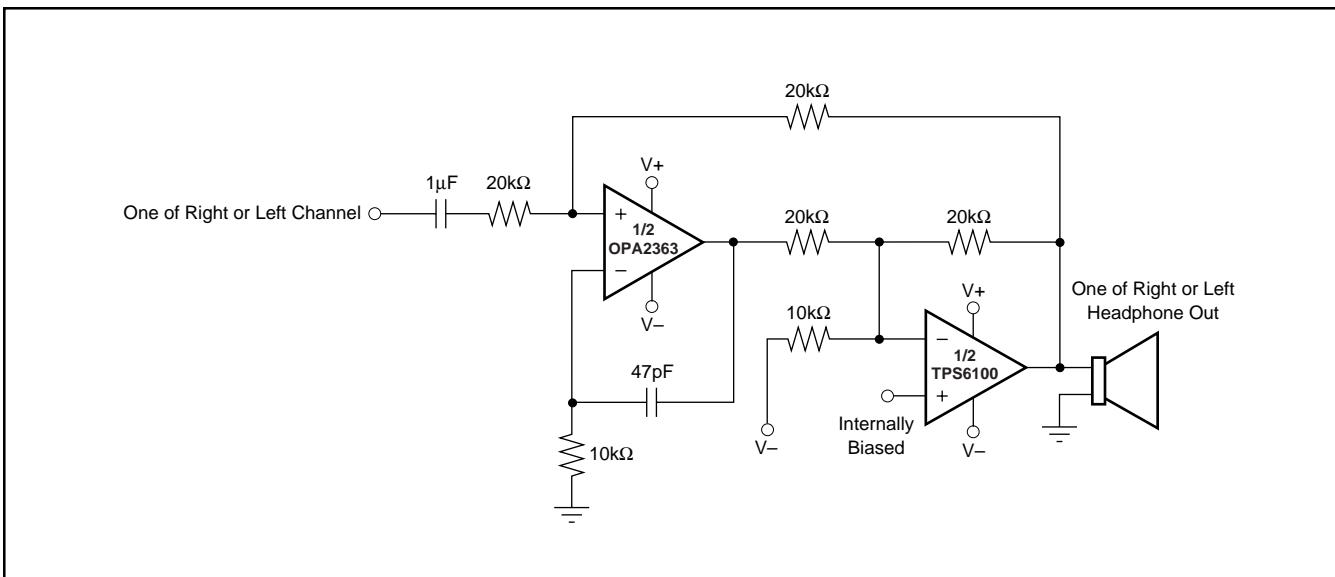


FIGURE 9. OPA2363 Configured as Half of a Dual Stereo Headphone Driver.

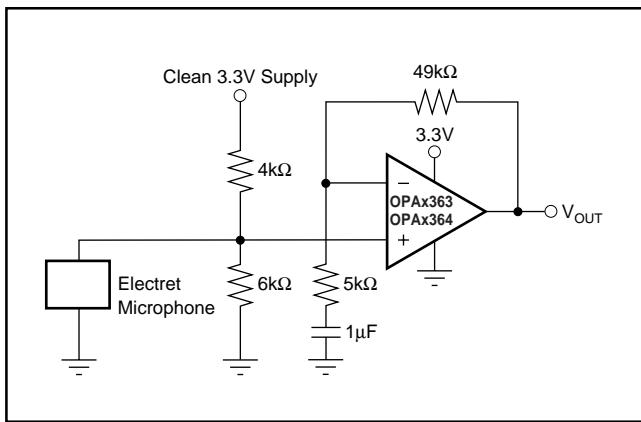


FIGURE 10. Microphone Preamplifier.

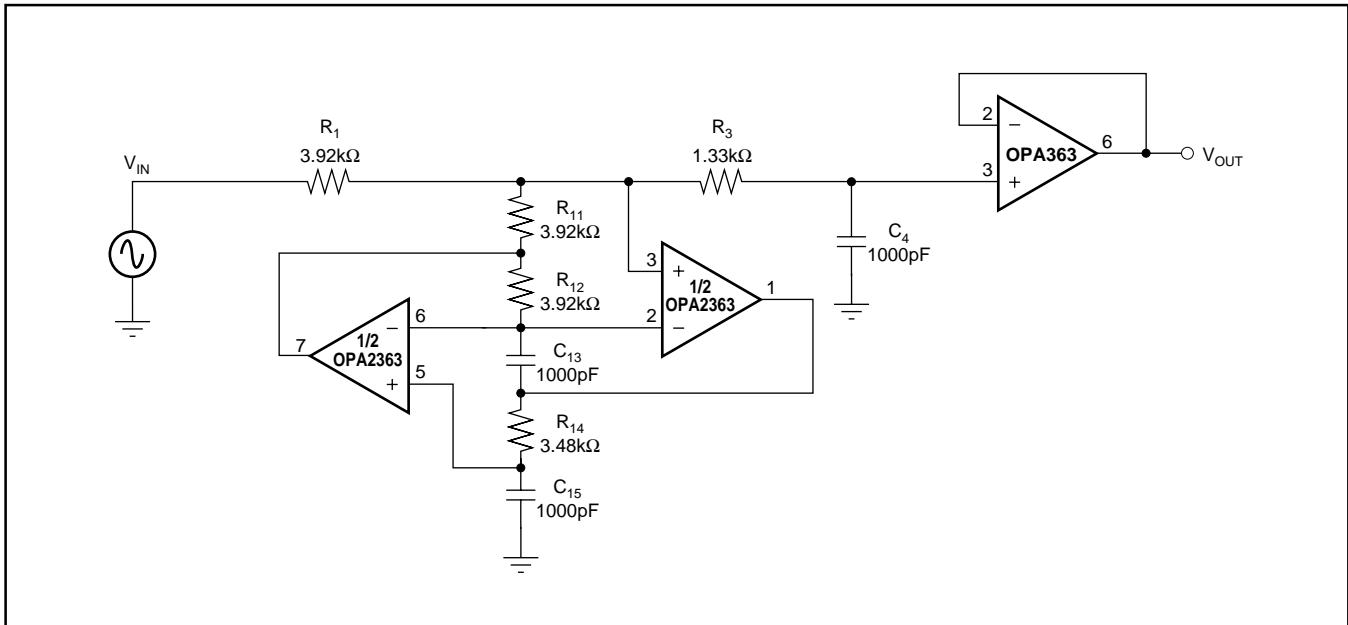


FIGURE 11. The OPA2363 as a 3rd-Order, 40kHz, Low-Pass GIC Filter.

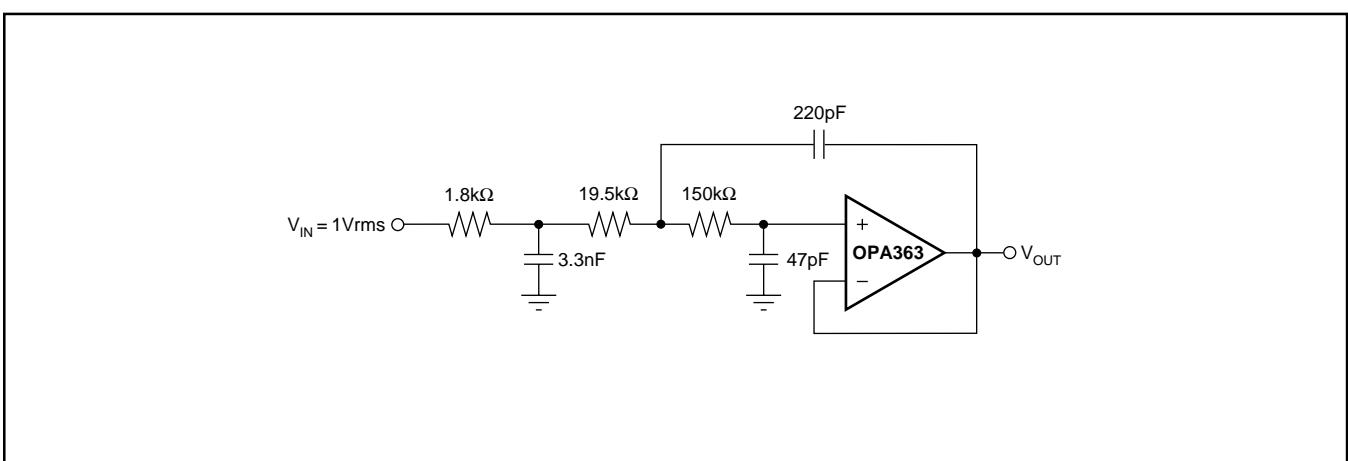


FIGURE 12. The OPA363 or OPA364 Configured as a 3-Pole, 20kHz, Sallen-Key Filter.


ACTIVE FILTERING

Low harmonic distortion and noise specifications plus high gain and slew rate make the OPA363 and OPA364 optimal candidates for active filtering. Figure 11 shows the OPA2363 configured as a low-distortion, 3rd-order GIC (General Impedance Converter) filter. Figure 12 shows the implementation of a Sallen-Key, 3-pole, low-pass Bessel filter.

PACKAGE DRAWINGS

DBV (R-PDSO-G6)

PLASTIC SMALL-OUTLINE

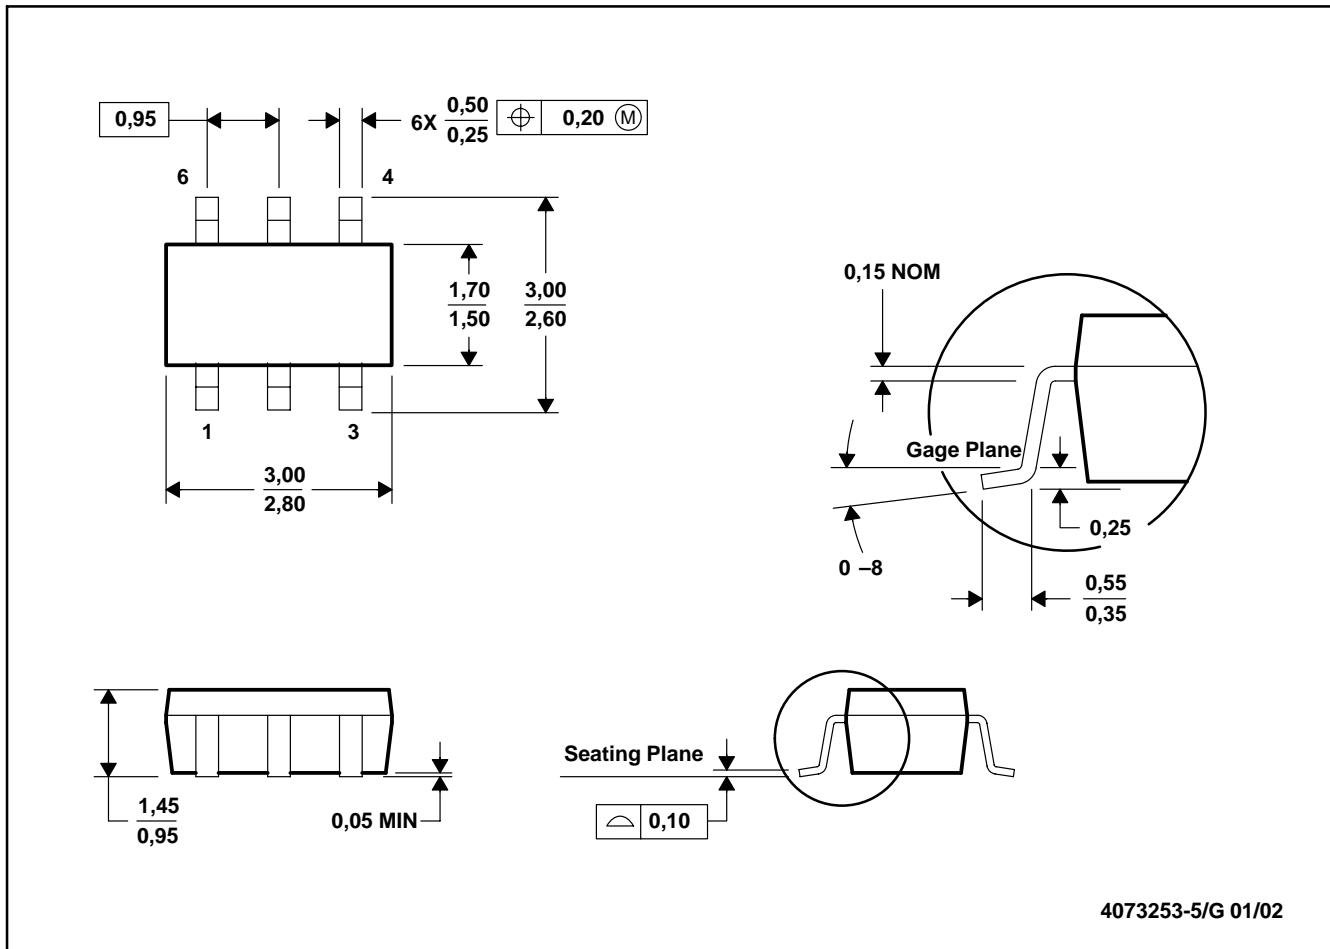


NOTES:

- All linear dimensions are in millimeters.
- This drawing is subject to change without notice.
- Body dimensions do not include mold flash or protrusion.
- Leads 1, 2, 3 may be wider than leads 4, 5, 6 for package orientation.

PACKAGE DRAWINGS (Cont.)

D (R-PDSO-G**) PLASTIC SMALL-OUTLINE PACKAGE

8 PINS SHOWN

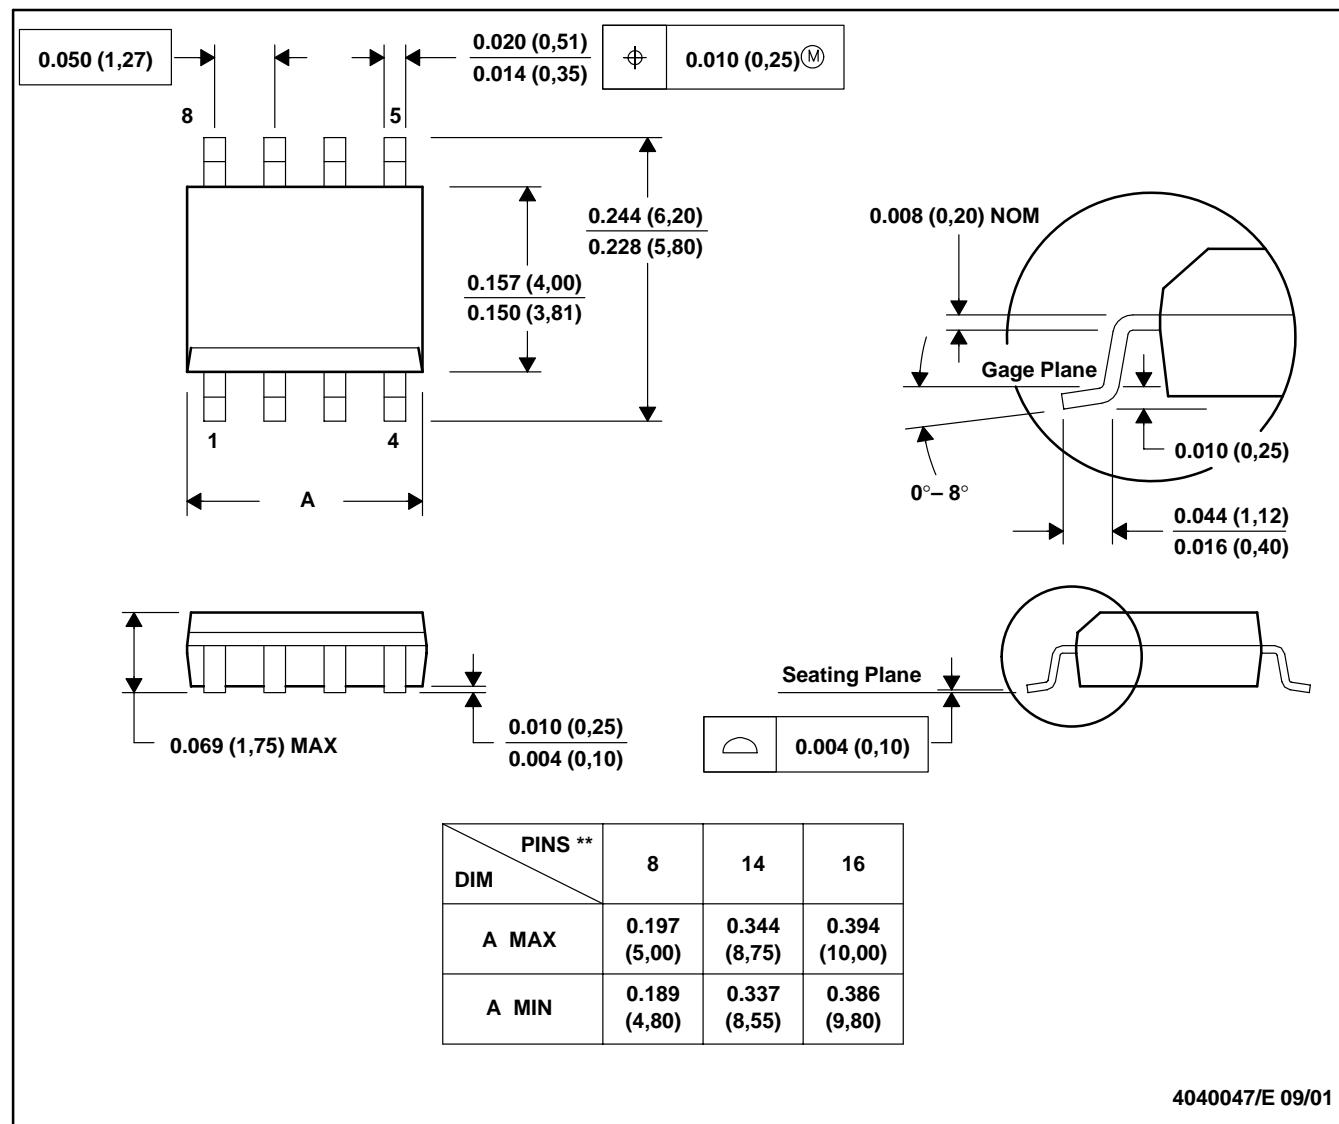

NOTES: A. All linear dimensions are in inches (millimeters).

B. This drawing is subject to change without notice.


C. Body dimensions do not include mold flash or protrusion, not to exceed 0.006 (0.15).

D. Falls within JEDEC MS-012

PACKAGE DRAWINGS (Cont.)

DGS (S-PDSO-G10)

PLASTIC SMALL-OUTLINE PACKAGE

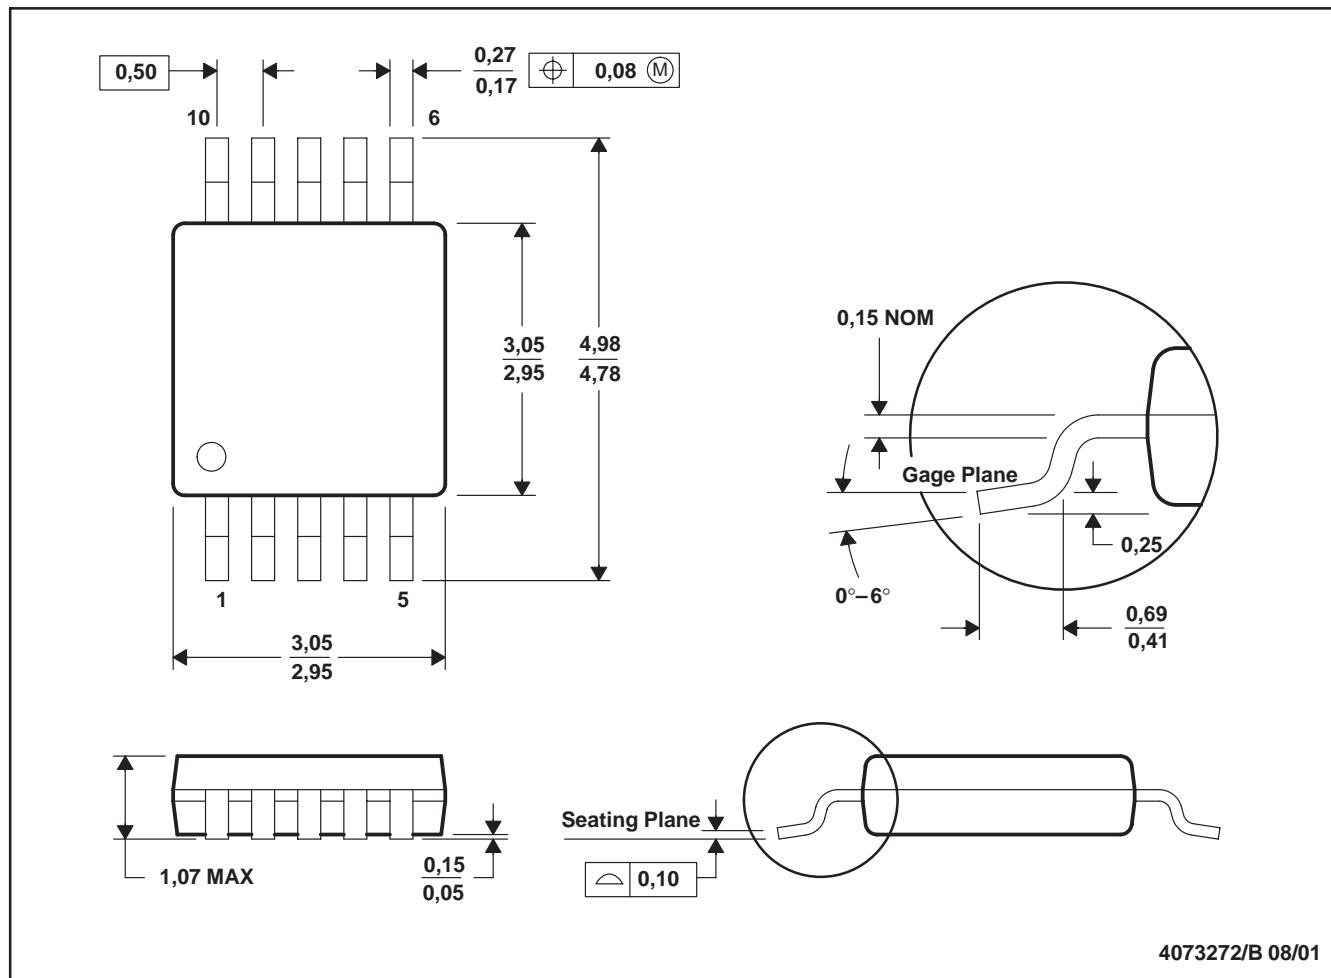


NOTES:

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion.
- A. Falls within JEDEC MO-187

PACKAGE DRAWINGS (Cont.)

DBV (R-PDSO-G5)

PLASTIC SMALL-OUTLINE

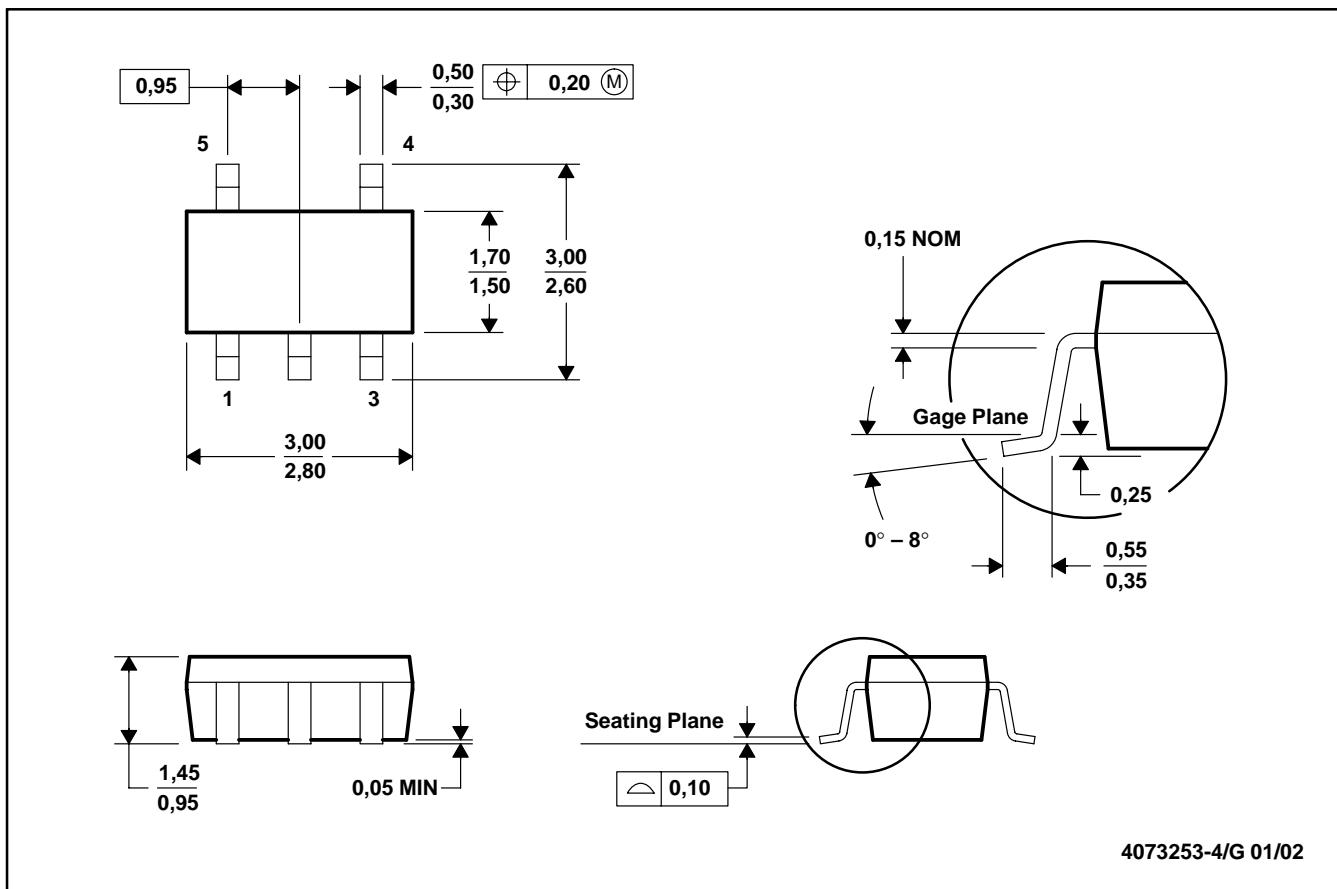


NOTES: A. All linear dimensions are in millimeters.
 B. This drawing is subject to change without notice.
 C. Body dimensions do not include mold flash or protrusion.
 D. Falls within JEDEC MO-178

PACKAGE DRAWINGS (Cont.)

DGK (R-PDSO-G8)

PLASTIC SMALL-OUTLINE PACKAGE

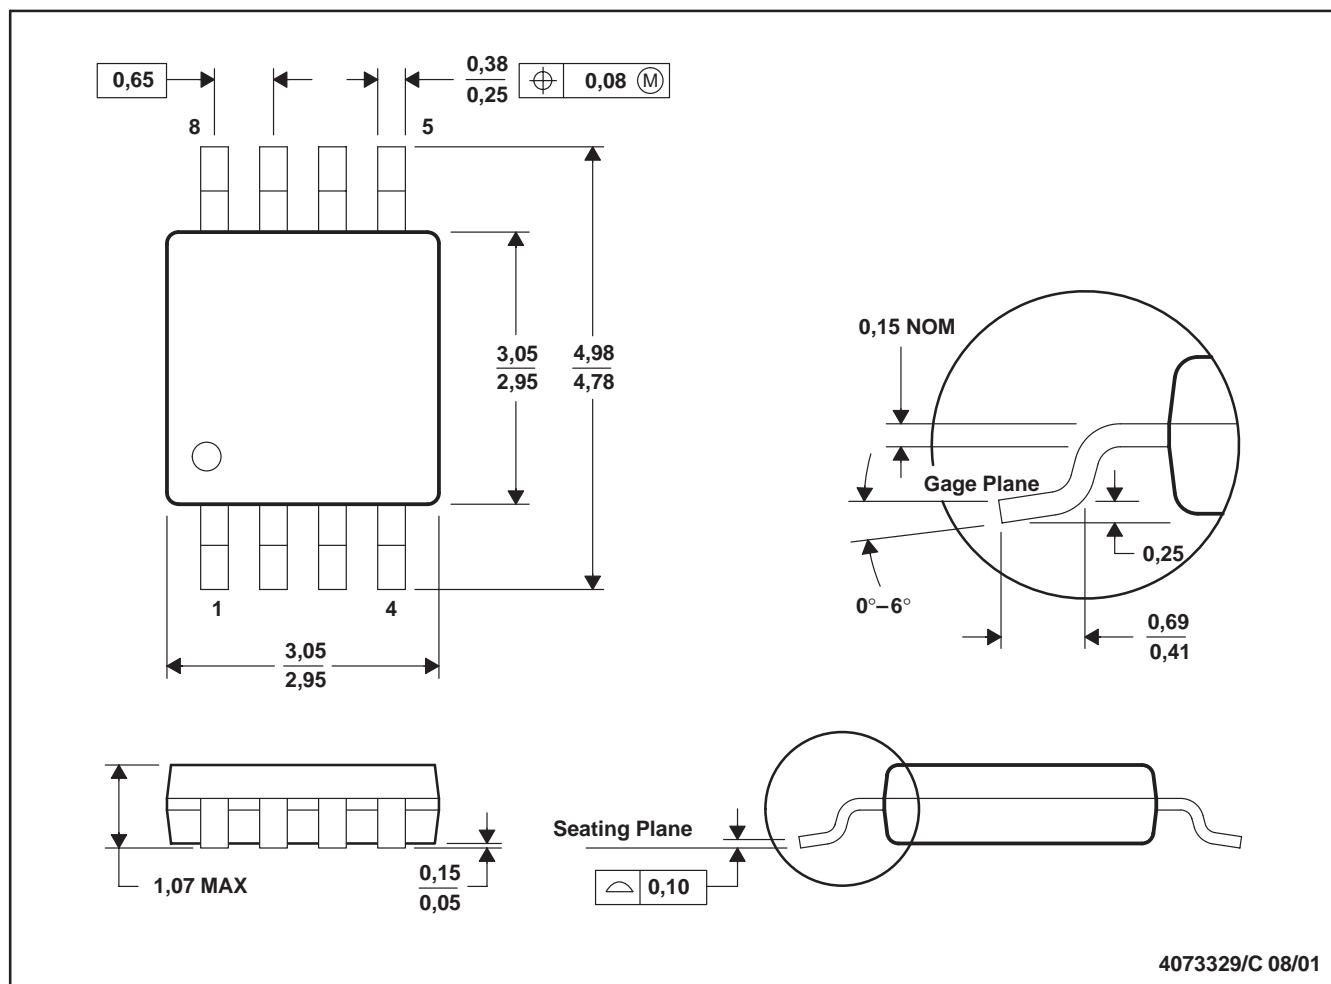


PACKAGE DRAWINGS (Cont.)

PW (R-PDSO-G**)

14 PINS SHOWN

PLASTIC SMALL-OUTLINE PACKAGE

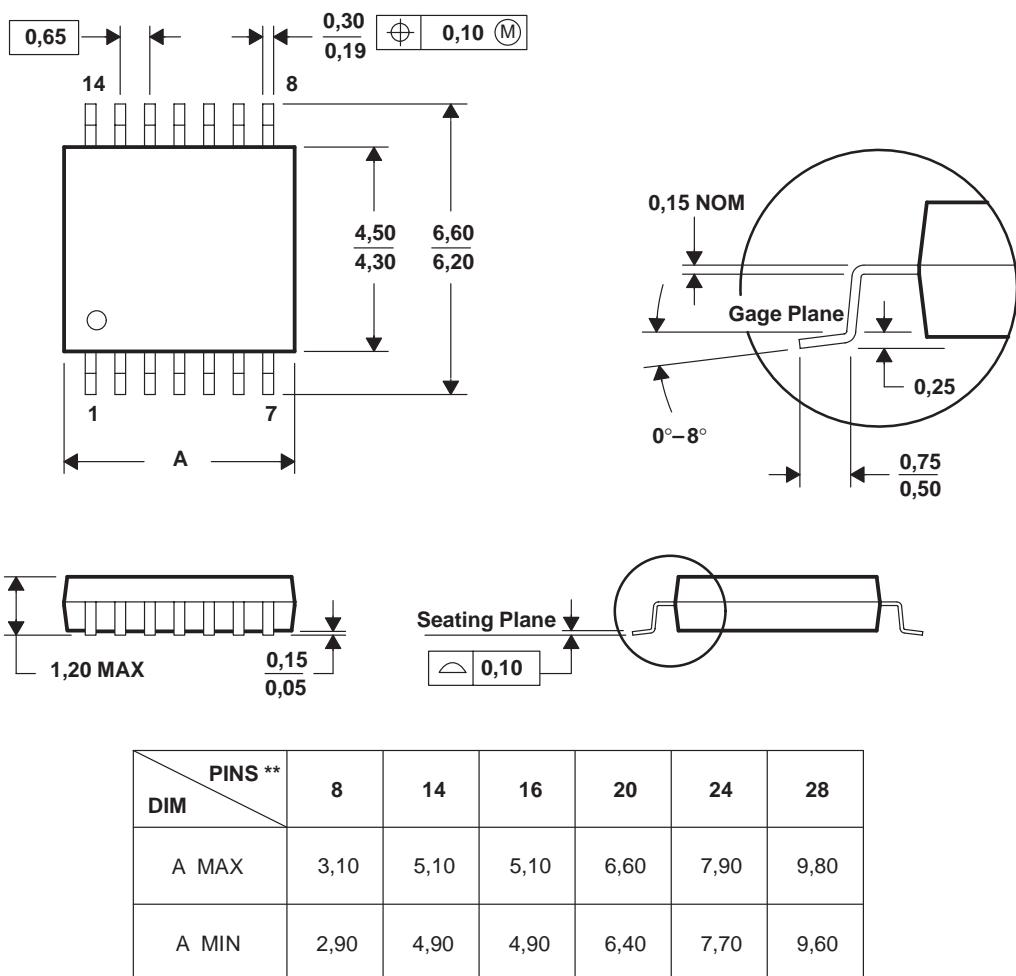

4040064/F 01/97

NOTES: A. All linear dimensions are in millimeters.
 B. This drawing is subject to change without notice.
 C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.
 D. Falls within JEDEC MO-153

PACKAGING INFORMATION

| ORDERABLE DEVICE | STATUS(1) | PACKAGE TYPE | PACKAGE DRAWING | PINS | PACKAGE QTY |
|------------------|-----------|--------------|-----------------|------|-------------|
| OPA2363AIDGSR | ACTIVE | VSSOP | DGS | 10 | 2500 |
| OPA2363AIDGST | ACTIVE | VSSOP | DGS | 10 | 250 |
| OPA2363IDGSR | ACTIVE | VSSOP | DGS | 10 | 2500 |
| OPA2363IDGST | ACTIVE | VSSOP | DGS | 10 | 250 |
| OPA2364AID | ACTIVE | SOIC | D | 8 | 100 |
| OPA2364AIDGKR | ACTIVE | VSSOP | DGK | 8 | 2500 |
| OPA2364AIDGKT | ACTIVE | VSSOP | DGK | 8 | 250 |
| OPA2364AIDR | ACTIVE | SOIC | D | 8 | 2500 |
| OPA2364ID | ACTIVE | SOIC | D | 8 | 100 |
| OPA2364IDGKR | ACTIVE | VSSOP | DGK | 8 | 2500 |
| OPA2364IDGKT | ACTIVE | VSSOP | DGK | 8 | 250 |
| OPA2364IDR | ACTIVE | SOIC | D | 8 | 2500 |
| OPA363AID | ACTIVE | SOIC | D | 8 | 100 |
| OPA363AIDBVR | ACTIVE | SOP | DBV | 6 | 3000 |
| OPA363AIDBVT | ACTIVE | SOP | DBV | 6 | 250 |
| OPA363AIDR | ACTIVE | SOIC | D | 8 | 2500 |
| OPA363ID | ACTIVE | SOIC | D | 8 | 100 |
| OPA363IDBVR | ACTIVE | SOP | DBV | 6 | 3000 |
| OPA363IDBVT | ACTIVE | SOP | DBV | 6 | 250 |
| OPA363IDR | ACTIVE | SOIC | D | 8 | 2500 |
| OPA364AID | ACTIVE | SOIC | D | 8 | 100 |
| OPA364AIDBVR | ACTIVE | SOP | DBV | 5 | 3000 |
| OPA364AIDBVT | ACTIVE | SOP | DBV | 5 | 250 |
| OPA364AIDR | ACTIVE | SOIC | D | 8 | 2500 |
| OPA364ID | ACTIVE | SOIC | D | 8 | 100 |
| OPA364IDBVR | ACTIVE | SOP | DBV | 5 | 3000 |
| OPA364IDBVT | ACTIVE | SOP | DBV | 5 | 250 |
| OPA364IDR | ACTIVE | SOIC | D | 8 | 2500 |
| OPA4364AID | ACTIVE | SOIC | D | 14 | 58 |
| OPA4364AIDR | ACTIVE | SOIC | D | 14 | 2500 |
| OPA4364AIPWR | ACTIVE | TSSOP | PW | 14 | 2500 |
| OPA4364AIPWT | ACTIVE | TSSOP | PW | 14 | 250 |

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

| Products | | Applications | |
|------------------|------------------------|---------------------|--|
| Amplifiers | amplifier.ti.com | Audio | www.ti.com/audio |
| Data Converters | dataconverter.ti.com | Automotive | www.ti.com/automotive |
| DSP | dsp.ti.com | Broadband | www.ti.com/broadband |
| Interface | interface.ti.com | Digital Control | www.ti.com/digitalcontrol |
| Logic | logic.ti.com | Military | www.ti.com/military |
| Power Mgmt | power.ti.com | Optical Networking | www.ti.com/opticalnetwork |
| Microcontrollers | microcontroller.ti.com | Security | www.ti.com/security |
| | | Telephony | www.ti.com/telephony |
| | | Video & Imaging | www.ti.com/video |
| | | Wireless | www.ti.com/wireless |

Mailing Address: Texas Instruments
Post Office Box 655303 Dallas, Texas 75265

Copyright © 2004, Texas Instruments Incorporated