

# C106 Series

Preferred Devices

## Sensitive Gate Silicon Controlled Rectifiers

### Reverse Blocking Thyristors

Glassivated PNP devices designed for high volume consumer applications such as temperature, light, and speed control; process and remote control, and warning systems where reliability of operation is important.

#### Features

- Glassivated Surface for Reliability and Uniformity
- Power Rated at Economical Prices
- Practical Level Triggering and Holding Characteristics
- Flat, Rugged, Thermopad Construction for Low Thermal Resistance, High Heat Dissipation and Durability
- Sensitive Gate Triggering
- Pb-Free Packages are Available\*




**ON Semiconductor®**

<http://onsemi.com>

#### SCRs

**4 A RMS, 200 – 600 Volts**



TO-225AA  
CASE 077  
STYLE 2

#### MARKING DIAGRAM & PIN ASSIGNMENT



Y = Year  
WW = Work Week  
C106xx = Device Code  
xx = B, D, D1, M, M1  
G = Pb-Free Package

#### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 2 of this data sheet.

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

## C106 Series

### MAXIMUM RATINGS (T<sub>J</sub> = 25°C unless otherwise noted)

| Characteristic   | Symbol                                 | Max               | Unit             |
|--|--|-------------------|------------------|
| Peak Repetitive Off-State Voltage (Note 1)<br>(Sine Wave, 50–60 Hz, R <sub>GK</sub> = 1 kΩ,<br>T <sub>C</sub> = -40° to 110°C) | V <sub>DRM</sub> ,<br>V <sub>RRM</sub> | 200<br>400<br>600 | V                |
| On-State RMS Current<br>(180° Conduction Angles, T <sub>C</sub> = 80°C)  | I <sub>T(RMS)</sub>                    | 4.0               | A                |
| Average On-State Current<br>(180° Conduction Angles, T <sub>C</sub> = 80°C)  | I <sub>T(AV)</sub>                     | 2.55              | A                |
| Peak Non-Repetitive Surge Current<br>(1/2 Cycle, Sine Wave, 60 Hz, T <sub>J</sub> = +110°C)                                    | I <sub>TSM</sub>                       | 20                | A                |
| Circuit Fusing Considerations (t = 8.3 ms)   | I <sup>2</sup> t                       | 1.65              | A <sup>2</sup> s |
| Forward Peak Gate Power<br>(Pulse Width ≤ 1.0 μsec, T <sub>C</sub> = 80°C)   | P <sub>GM</sub>                        | 0.5               | W                |
| Forward Average Gate Power<br>(Pulse Width ≤ 1.0 μsec, T <sub>C</sub> = 80°C)  | P <sub>G(AV)</sub>                     | 0.1               | W                |
| Forward Peak Gate Current<br>(Pulse Width ≤ 1.0 μsec, T <sub>C</sub> = 80°C)   | I <sub>GM</sub>                        | 0.2               | A                |
| Operating Junction Temperature Range   | T <sub>J</sub>                         | -40 to +110       | °C               |
| Storage Temperature Range  | T <sub>stg</sub>                       | -40 to +150       | °C               |
| Mounting Torque (Note 2)   | -                                      | 6.0               | in. lb.          |

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

- V<sub>DRM</sub> and V<sub>RRM</sub> for all types can be applied on a continuous basis. Ratings apply for zero or negative gate voltage; however, positive gate voltage shall not be applied concurrent with negative potential on the anode. Blocking voltages shall not be tested with a constant current source such that the voltage ratings of the devices are exceeded.
- Torque rating applies with use of compression washer (B52200F006). Mounting torque in excess of 6 in. lb. does not appreciably lower case-to-sink thermal resistance. Anode lead and heatsink contact pad are common.

### THERMAL CHARACTERISTICS (T<sub>C</sub> = 25°C unless otherwise noted.)

| Characteristic   | Symbol           | Max | Unit |
|--|------------------|-----|------|
| Thermal Resistance, Junction-to-Case   | R <sub>θJC</sub> | 3.0 | °C/W |
| Thermal Resistance, Junction-to-Ambient  | R <sub>θJA</sub> | 75  | °C/W |
| Maximum Lead Temperature for Soldering Purposes 1/8 in. from Case for 10 Seconds | T <sub>L</sub>   | 260 | °C   |

### ORDERING INFORMATION

| Device   | Package               | Shipping†       |
|----------|-----------------------|-----------------|
| C106B    | TO-225AA              | 500 Units / Box |
| C106BG   | TO-225AA<br>(Pb-Free) | 500 Units / Box |
| C106D    | TO-225AA              | 500 Units / Box |
| C106DG   | TO-225AA<br>(Pb-Free) | 500 Units / Box |
| C106D1*  | TO-225AA              | 500 Units / Box |
| C106D1G* | TO-225AA<br>(Pb-Free) | 500 Units / Box |
| C106M    | TO-225AA              | 500 Units / Box |
| C106MG   | TO-225AA<br>(Pb-Free) | 500 Units / Box |
| C106M1*  | TO-225AA              | 500 Units / Box |
| C106M1G* | TO-225AA<br>(Pb-Free) | 500 Units / Box |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*D1 signifies European equivalent for D suffix and M1 signifies European equivalent for M suffix.

# C106 Series

## ELECTRICAL CHARACTERISTICS (T<sub>C</sub> = 25°C unless otherwise noted.)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|----------------|--------|-----|-----|-----|------|
|----------------|--------|-----|-----|-----|------|

### OFF CHARACTERISTICS

|   |   |   |   |     |    |
|---|---|---|---|-----|----|
| Peak Repetitive Forward or Reverse Blocking Current<br>(V <sub>AK</sub> = Rated V <sub>DRM</sub> or V <sub>R<sub>RRM</sub></sub> , R <sub>GK</sub> = 1000 Ohms) | I <sub>DRM</sub> , I <sub>R<sub>RRM</sub></sub> | - | - | 10  | μA |
|   |   | - | - | 100 | μA |

### ON CHARACTERISTICS

|  |                  |     |      |     |    |
|--|------------------|-----|------|-----|----|
| Peak Forward On-State Voltage (Note 3)<br>(I <sub>TM</sub> = 4 A)  | V <sub>TM</sub>  | -   | -    | 2.2 | V  |
| Gate Trigger Current (Continuous dc) (Note 4)<br>(V <sub>AK</sub> = 6 Vdc, R <sub>L</sub> = 100 Ohms)                            | I <sub>GT</sub>  | -   | 15   | 200 | μA |
|  |                  | -   | 35   | 500 |    |
| Peak Reverse Gate Voltage (I <sub>GR</sub> = 10 μA)  | V <sub>GRM</sub> | -   | -    | 6.0 | V  |
| Gate Trigger Voltage (Continuous dc) (Note 4)<br>(V <sub>AK</sub> = 6 Vdc, R <sub>L</sub> = 100 Ohms)                            | V <sub>GT</sub>  | 0.4 | 0.60 | 0.8 | V  |
|  |                  | 0.5 | 0.75 | 1.0 |    |
| Gate Non-Trigger Voltage (Continuous dc) (Note 4)<br>(V <sub>AK</sub> = 12 V, R <sub>L</sub> = 100 Ohms, T <sub>J</sub> = 110°C) | V <sub>GD</sub>  | 0.2 | -    | -   | V  |
| Latching Current<br>(V <sub>AK</sub> = 12 V, I <sub>G</sub> = 20 mA)   | I <sub>L</sub>   | -   | 0.20 | 5.0 | mA |
|  |                  | -   | 0.35 | 7.0 |    |
| Holding Current (V <sub>D</sub> = 12 Vdc)<br>(Initiating Current = 20 mA, Gate Open)   | I <sub>H</sub>   | -   | 0.19 | 3.0 | mA |
|  |                  | -   | 0.33 | 6.0 |    |
|  |                  | -   | 0.07 | 2.0 |    |


### DYNAMIC CHARACTERISTICS

|   |       |   |     |   |      |
|---|-------|---|-----|---|------|
| Critical Rate-of-Rise of Off-State Voltage<br>(V <sub>AK</sub> = Rated V <sub>DRM</sub> , Exponential Waveform, R <sub>GK</sub> = 1000 Ohms,<br>T <sub>J</sub> = 110°C) | dv/dt | - | 8.0 | - | V/μs |
|---|-------|---|-----|---|------|

- Pulse Test: Pulse Width ≤ 2.0 ms, Duty Cycle ≤ 2%.
- R<sub>GK</sub> is not included in measurement.

## Voltage Current Characteristic of SCR

| Symbol                       | Parameter                                 |
|------------------------------|---|
| V <sub>DRM</sub>             | Peak Repetitive Off State Forward Voltage |
| I <sub>DRM</sub>             | Peak Forward Blocking Current             |
| V <sub>R<sub>RRM</sub></sub> | Peak Repetitive Off State Reverse Voltage |
| I <sub>R<sub>RRM</sub></sub> | Peak Reverse Blocking Current             |
| V <sub>TM</sub>              | Peak On State Voltage                     |
| I <sub>H</sub>               | Holding Current                           |

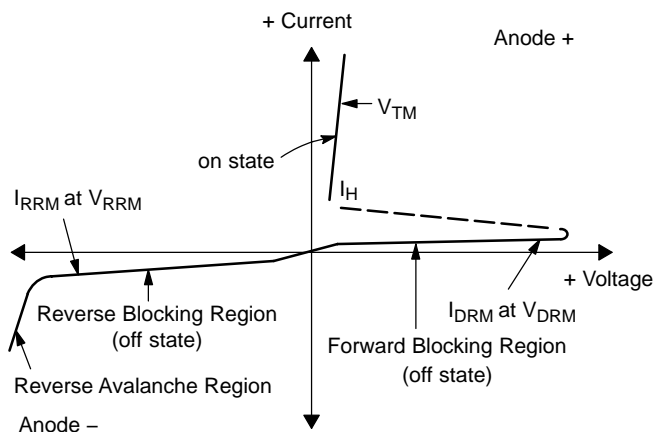

# C106 Series

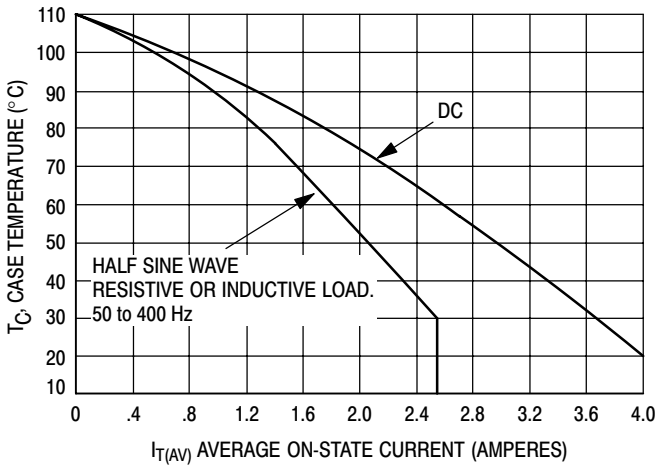


Figure 1. Average Current Derating

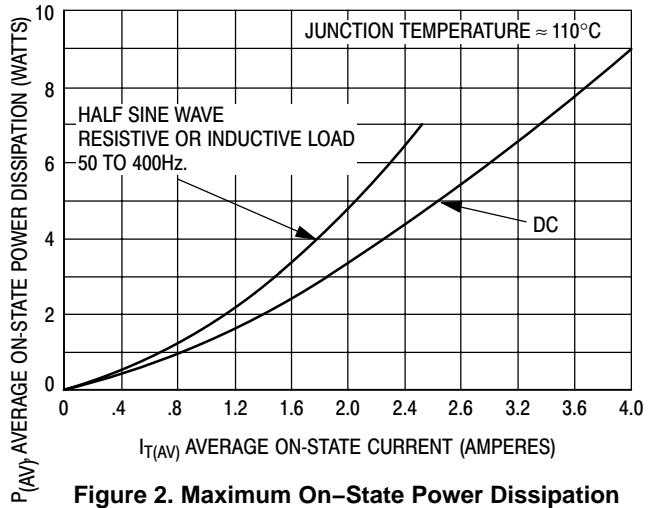


Figure 2. Maximum On-State Power Dissipation

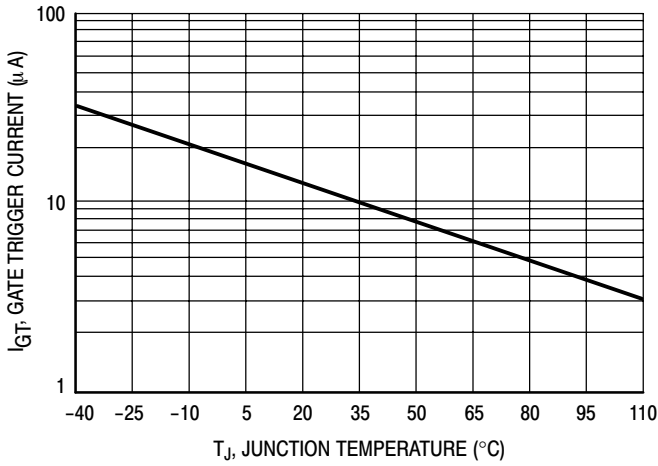


Figure 3. Typical Gate Trigger Current versus Junction Temperature

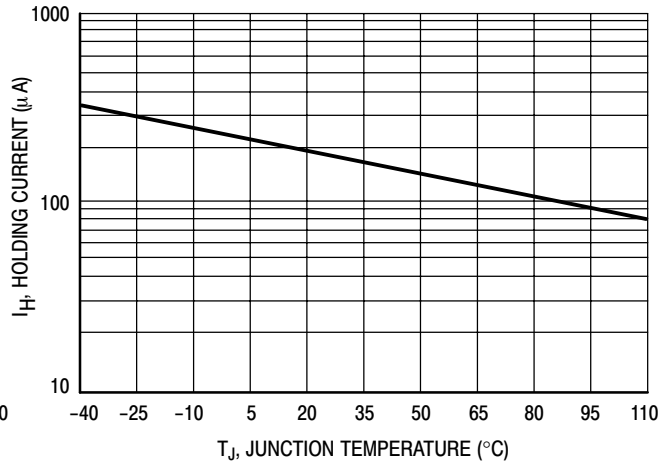


Figure 4. Typical Holding Current versus Junction Temperature

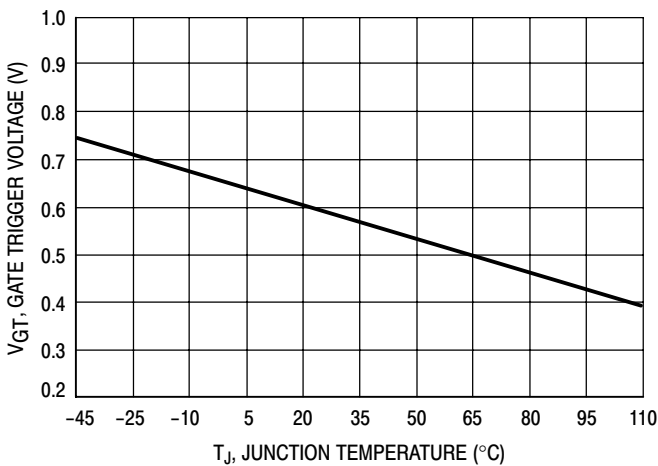


Figure 5. Typical Gate Trigger Voltage versus Junction Temperature


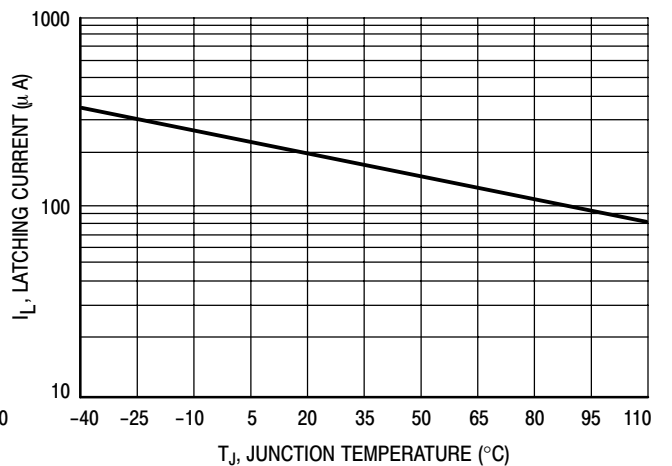


Figure 6. Typical Latching Current versus Junction Temperature


# C106 Series

## PACKAGE INTERCHANGEABILITY

The dimensional diagrams below compare the critical dimensions of the ON Semiconductor C-106 package with competitive devices. It has been demonstrated that the smaller dimensions of the ON Semiconductor package make it compatible in most lead-mount and chassis-mount applications. The user is advised to compare all critical dimensions for mounting compatibility.



ON Semiconductor C-106 Package




Competitive C-106 Package

# C106 Series

## PACKAGE DIMENSIONS

TO-225  
CASE 77-09  
ISSUE Z

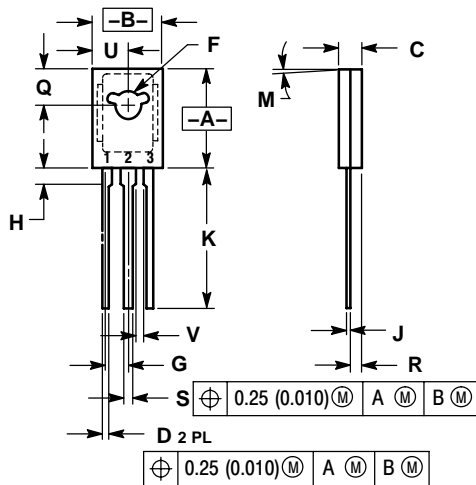

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. 077-01 THRU -08 OBSOLETE, NEW STANDARD 077-09.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.425     | 0.435 | 10.80       | 11.04 |
| B   | 0.295     | 0.305 | 7.50        | 7.74  |
| C   | 0.095     | 0.105 | 2.42        | 2.66  |
| D   | 0.020     | 0.026 | 0.51        | 0.66  |
| F   | 0.115     | 0.130 | 2.93        | 3.30  |
| G   | 0.094 BSC |       | 2.39 BSC    |       |
| H   | 0.050     | 0.095 | 1.27        | 2.41  |
| J   | 0.015     | 0.025 | 0.39        | 0.63  |
| K   | 0.575     | 0.655 | 14.61       | 16.63 |
| M   | 5° TYP    |       | 5° TYP      |       |
| Q   | 0.148     | 0.158 | 3.76        | 4.01  |
| R   | 0.045     | 0.065 | 1.15        | 1.65  |
| S   | 0.025     | 0.035 | 0.64        | 0.88  |
| U   | 0.145     | 0.155 | 3.69        | 3.93  |
| V   | 0.040     | ---   | 1.02        | ---   |

STYLE 2:

- PIN 1. CATHODE
2. ANODE
3. GATE

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

**LITERATURE FULFILLMENT:**  
Literature Distribution Center for ON Semiconductor  
P.O. Box 61312, Phoenix, Arizona 85082-1312 USA  
**Phone:** 480-829-7710 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 480-829-7709 or 800-344-3867 Toll Free USA/Canada  
**Email:** orderlit@onsemi.com

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada

**Japan:** ON Semiconductor, Japan Customer Focus Center  
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051  
**Phone:** 81-3-5773-3850

**ON Semiconductor Website:** <http://onsemi.com>

**Order Literature:** <http://www.onsemi.com/litorder>

For additional information, please contact your local Sales Representative.