

TC1046/A and 1047/A Voltage Output Temperature Sensor Family


Product Information



The **TC1046/A** and **TC1047/A** are voltage output temperature sensing products in space-saving SOT packages.

The TC1046/A and TC1047/A develop an output voltage proportional to temperature with a nominal temperature coefficient of 6.25mV/°C and 10mV/°C respectively. Both temperature-to-voltage converters can sense a -40°C to +125°C temperature range while operating from a single 2.5V supply. The devices feature an offset voltage that allows reading negative temperatures without the need for a negative supply voltage. The extremely low operating current minimizes self-heating and maximizes battery life. The TC1046/A and TC1047/A are fully specified from 2.7V to 4.4V and 2.5V to 5.5V respectively, and are available in small, space-saving 3-lead SOT-23 packages.

High accuracy, low operating current and small packages make these devices ideal for a variety of applications such as cellular phones, consumer electronics, power supplies, amplifiers, motors, battery management, printers, industrial control, appliances, and office equipment.

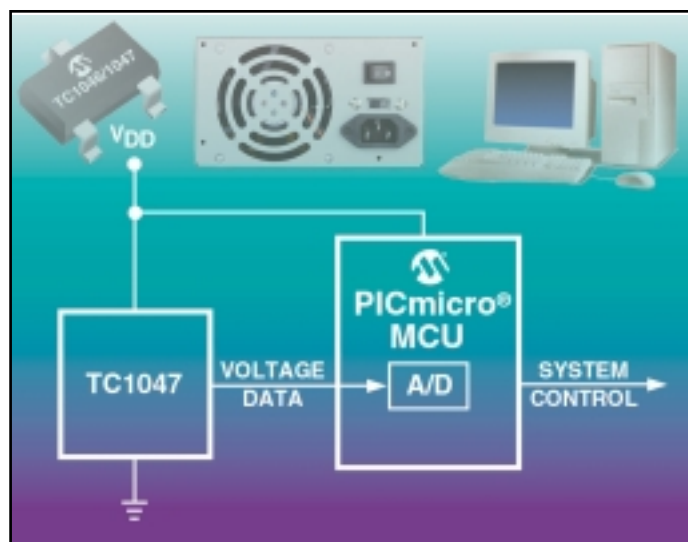

Features:

- $\pm 0.5^\circ\text{C}$ typical temperature conversion accuracy
- Operating current as low as 35 μA
- 2.5V to 5.5V supply voltage range
- -40°C to +125°C temperature range
- Available in 6.25mV/°C and 10mV/°C linear temperature slopes
- Small 3-lead SOT-23 packages

TC1046/A and 1047/A

Voltage Output Temperature Sensor Family *Continued*

Additional Information:

- Microchip's web site: www.microchip.com
- Microchip's *Technical Library CD-ROM*, Order No. DS00161
- *Analog Interface Handbook*, Order No. DS00207
- Product Line Card, Order No. DS00148
- *Analog Design Pack CD-ROM*, Order No. DS51205

Voltage Output Temperature Sensor Family

Product	Linear Temperature Slope	Typical Accuracy	Temperature Range	V _{CC} Range	Maximum I _Q	# of Pins/Package
TC1046	6.25mV/°C	±0.5°C	-40°C to +125°C	2.7V to 4.4V	60µA	3TT
TC1047	10mV/°C	±0.5°C	-40°C to +125°C	2.7V to 4.4V	60µA	3TT
TC1046A	6.25mV/°C	±0.5°C	-40°C to +125°C	2.5V to 5.5V	60µA	3TT
TC1047A	10mV/°C	±0.5°C	-40°C to +125°C	2.5V to 5.5V	60µA	3TT

Package Key: TT = SOT-23

Americas

Atlanta (770) 640-0034
 Austin – Analog (512) 345-2030
 Boston (978) 692-3848
 Boston – Analog (978) 371-6400
 Chicago (630) 285-0071
 Dallas (972) 818-7423
 Dayton (937) 291-1654
 Detroit (248) 538-2250
 Los Angeles (949) 263-1888
 Mountain View (650) 968-9241
 New York (631) 273-5305
 Rocky Mountain (480) 792-7966
 San Jose (408) 436-7950
 Toronto (905) 673-0699

Asia /Pacific

Australia 61-2-9868-6733
 China – Beijing 86-10-8528-2100
 China – Shanghai 86-21-6275-5700
 Hong Kong 852-2-401-1200
 India 91-80-229-0061
 Japan 81-45-471- 6166
 Korea 82-2-554-7200
 Singapore 65-334-8870
 Taiwan 886-2-2717-7175

Europe

Denmark 45-4420-9895
 France 33-1-69-53-63-20
 Germany 49-89-627-144-0
 Germany – Analog 49-89-895-650-0
 Italy 39-039-65791-1
 United Kingdom 44-118-921-5869



MICROCHIP

The Embedded Control Solutions Company®

Microchip Technology Inc. • 2355 W. Chandler Blvd. • Chandler, AZ 85224-6199 • (480) 792-7200 • Fax (480) 792-9210

The Microchip name and logo, and The Embedded Control Solutions Company are registered trademarks of Microchip Technology Inc. in the U.S.A. and other countries. All other trademarks are the property of their Information subject to change. ©2001 Microchip Technology Inc. Printed in the U.S.A. All rights reserved. DS21638A 6/01